
Jellemz?k

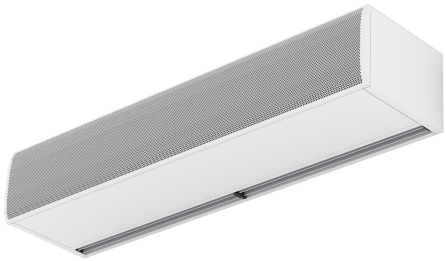


- "Speciáln? navržena pro odpuzování hmyzu u vstupu nap?. do potraviná?ských za?ízení a za?ízení potraviná?ského pr?myslu, nemocnic nebo ?istých zón. Vysoká rychlost vzduchové bariéry brání létajícímu hmyzu p?ed vniknutím do budovy. Pro výšky dve?í až 2,3 metr? dle standardu NSF 37."
- Samonosná konstrukce plášt? z pozinkované ocelové desky, ve standardu nalakovaného epoxy-polyesterovou bílou barvou RAL9016.Jiné barvy ?i nerez ocel jsou dostupné na vyžádání.
- Velká fasetovaná vzduchová mrížka nevyžadující náro?nou údržbu.
- Výstupní lopatky z eloxovaného hliníku s profilem ve tvaru k?ídla, nastavitelné od 0 do 15 stup?? na každou stranu.
- EC odst?edivé ventilátory s dvojitou vstupní m?ížkou pohán?né motorem s vn?jším rotorem a nízkou hladinou hluku, s ú?innými ventilátory s velmi nízkou spot?ebou.
- Typ "A" bez oh?evu, pouze vzduch.
- Advanced Plug&Play control. Includes: Advanced PRO control with LCD display and integrated thermostat, door contact, 7m and remote control. With integrated functions: door delay (configurable); interface mode; operation, alarm and maintenance warning signals; and multiple digital inputs that modify the air curtain's operation.
- Includes protective varnish for the electronic board and control.
- Optional:
  • Auxiliary temperature sensors that improve air curtain control and increase energy savings.
  • Clever PRO intelligent control (automatic, programmable, ModBus via PLC, timer, etc.) with an additional temperature sensor.


M?szaki adatok

50Hz

modell	F?tetlen	
	(m³/h)	(m)
FLY KSB 1000 A	2.3	
FLY KSB 1500 A	2.3	
FLY KSB 2000 A	2.3	
FLY KSB 2500 A	2.3	
FLY KSB 3000 A	2.3	

Méretek



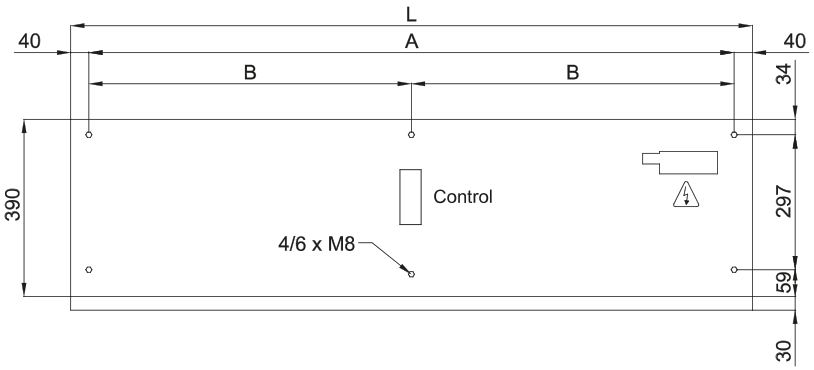

L	A	B
1000	920	-
1500	1420	710
2000	1920	960
2500	2420	1210
3000	2920	1460

